PART NO. 810713-F

LEGEND: () = QUANTITY/TOOL
* = QUANTITY/MULTI-PAK

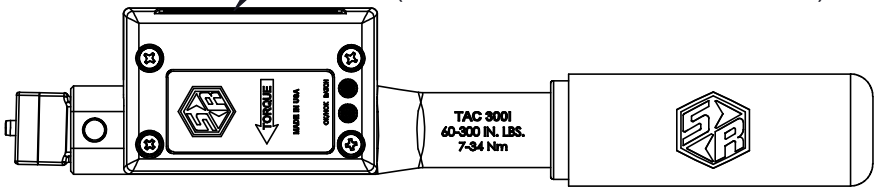

885135 (1) - TAC RADIO ASSEMBLY
885136 (1) - TAC TOP HOUSING COMPONENTS
885137 (1) - TAC BOTTOM HOUSING COMPONENTS
(SEE NOTES FOR DIFFERENCES)

816870 (2) - 10*
PAWL PIN

816872 (1) - 5*
PAWL LINK

812349 (1)
TORQUE SPRING

816878 (2) - 20*
BELLEVILLE WASHER

816847 (1) - 10*
INT. LOCK WASHER

816891 (1) - 10*
7/32" STEEL BALL

812224 (1)
LOCK PLUG

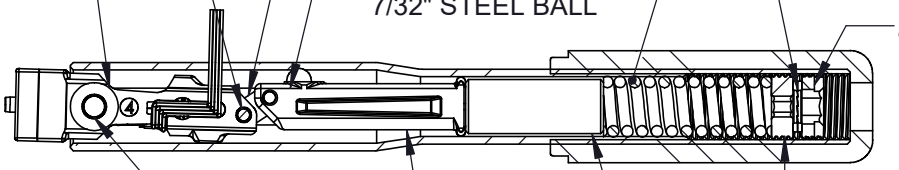

816799 (1) - 5*
HEAD BEARING PIN
(INCLUDES RETAINING RING)

812205 (1)
ADJUSTING PLUG

812583 (3)
TORQUE BLOCK

812200 (1)
SPACER

816867 (1) - 10*
PIN & SPRING ADAPTER

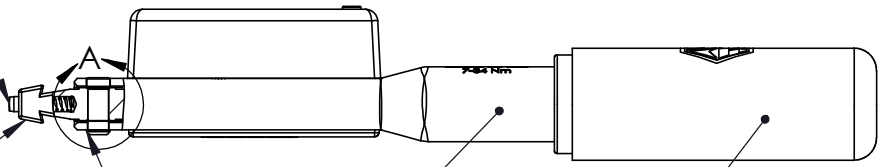

814993 (1)
CASE

812352 (1)
GRIP

21920 (1)
TRANSDUCER

816897 (1) - 10*
RETAINING RING

885135 - RADIO KIT INCLUDES TOP AND BOTTOM HOUSINGS, TAC PCBA, PCB INSULATION, 2.4 GHz RADIO, RADIO CABLE, RADIO COVER, LITEPIPES (2), LITEPIPE RETAINERS (2), RUBBER WASHERS (4), 4-40X5/8" MACHINE SCREWS (2), 4-40X1" SHEET METAL SCREWS (2), TAC LABEL, FCC LABEL, & NIMH LABEL.

885136 - TOP HOUSING ASSEMBLY INCLUDES LITEPIPES (2), LITEPIPE RETAINERS (2), RUBBER WASHERS (4), 4-40X5/8" MACHINE SCREWS (2), 4-40X1" SHEET METAL SCREWS (2), TAC LABEL, & FCC LABEL.

885137 - BOTTOM HOUSING ASSEMBLY INCLUDES BOTTOM HOUSING ASSY, COVER, AND NIMH LABEL.

21970 - BATTERY AAA (2)
857500 - CARTON
857470 - INSTRUCTIONS

WARNING: USE ONLY 1.2 VDC NiMH AAA RECHARGEABLE BATTERIES. OTHER BATTERIES CAN CAUSE DAMAGE TO THE BOARD AND IMPACT RADIO SIGNAL.

816799 - THIS PIN IS FORMED OVER **CUSTOMER MUST** GRIND OFF FORMED END & INSTALL THIS PIN FORMING THE HEAD OVER THE RETAINING RING AS SHOWN.

DETAIL A
SCALE 1 : 1
DEFORM PRIOR
TO CALIBRATION



3/24/2025

STURTEVANT RICHMONT®
TORQUE MEASUREMENT SYSTEMS
DIVISION OF RYESON CORPORATION

THIS PRINT AND ALL INFORMATION APPEARING THEREON IS THE PROPERTY OF "STURTEVANT RICHMONT". NEITHER THE PRINT NOR THE INFORMATION THEREON MAY BE REPRODUCED OR USED IN ANY MANNER WHATSOEVER OR DIVULGED TO ANY OTHER PERSON UNLESS SPECIFICALLY AUTHORIZED BY "STURTEVANT RICHMONT".

DESCRIPTION	DIAGRAM No	REV.
TAC-300I	810713-F	F